

Hydrotech

NRV (Non-Regenerating Valve) Whole House Carbon Filter

Economical Reduction of Chlorine, Chloramines and Other Bad Taste & Odors

Once water arrives safely at your home there is no further need for disinfectants. In fact they are undesirable! Disinfectants cause taste and bad odor, dry skin, damage plumbing, and can produce potentially harmful by-products.



Clean, Clear
Odor Free
Water




Features:

- ➔ Economical whole-house carbon filtration solution for reducing chlorine and other bad tastes and odors. TOK models reduce chlorine plus hydrogen sulfide (H₂S) caused by sulphate reducing bacteria common in warmer climates.
- ➔ Includes factory installed one-piece bypass
- ➔ Time saving quick connect fittings (90° ¾" NPT Elbows and 1" Straight NPT) included for faster, easier installation. Optional quick connect SharkBite® fittings also available.
- ➔ Five year warranty on Distribution Head.
- ➔ Ten Year Warranty on NSF Certified tank.



Specifications	NRV TO-100	NRV TO-150	NRV TOK-100	NRV TOK-150
Service Flow Rates				
Normal	5.0 gpm	7.0 gpm	5.0 gpm	7.0 gpm
Peak	7.0 gpm	10.0 gpm	7.0 gpm	10.0 gpm
Filter Media Volume - Cubic Feet	1.0 ft	1.5 ft	1.0 ft	1.5 ft
Filter Tank Size	9x48	10x54	9x48	10x54
Media Type	Coconut Carbon	Coconut Carbon	Coconut Carbon	Coconut Carbon
Media Loaded	Yes	Yes	Yes	Yes
KDF Protector	No	No	Yes	Yes
Tank Jacket	No	No	No	No
Shipping Weight	60 lbs	78 lbs	60 lbs	78 lbs
Plumbing Connections	Includes 3/4" 90° Elbows & 1" Straight NPT. Bypass Included.			
Electrical Requirements	None			
Water Temperature	Min 39 - Max. 100 degrees Fahrenheit			
Water Pressure	Max. 125 psi			

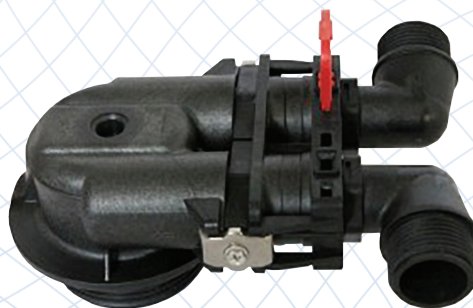

Economical non-back-washing distribution head with convenient quick connect fittings



Hydrotech

A Division of



In the U.S.A. 1-877-288-9888
In Canada 1-877-288-9888
www.hydrotechwater.com

Regina, SK • Cambridge, ON • Carmel, IN • Fridley, MN

Your Local Water Treatment Professional